



[www.festool.com.au](http://www.festool.com.au)

Online product catalogue

Service

Online Shops

News and special offers

Dealer search

Test reports

Example applications

3D animation

**Your link to more information...**

On our current Festool site you can find information about

- the complete product range
- interesting new products
- countless product animations
- many helpful application examples, and
- our comprehensive service offer.

And all of this at your leisure.

Do you want to be able to order around the clock?

This is possible at [www.festool.com.au](http://www.festool.com.au).

Simply visit the online shops of our system partner dealers and place your order.

# FESTOOL

[www.festool.com.au](http://www.festool.com.au)



Regardless of how long the warranty period is set to by law – with Festool you're guaranteed to be better off.

Festool grants 12 months guarantee from the date of purchase, as long as the tool has been used properly. This guarantee is automatically extended by 2 years, to

make a total of 3 years, provided the warranty form that is enclosed with every new tool is filled in completely and sent to Festool within 30 days of the date of purchase.

**Three years guarantee – that means above all three years security.**

**FESTOOL**  
**Tooltechnic Systems (AUS) PTY LTD**  
63-65 Quantum Close / PO Box 7075  
Dandenong VIC 3175

Phone 03-9799-9733  
Fax 03-9799-9766

Service Hotline: 1800 063 900  
E-mail: [festool@festool.com.au](mailto:festool@festool.com.au)

Subject to alterations and errors. All illustrations are non-binding. Compiled for TTS Tooltechnic Systems AG & Co. KG, D-Wendlingen, 03/2004



# FESTOOL

**It will be a long time before there's a better router than this!**

Router OF 1400 – sets new standards in its class



**No compromises !**

# The new router OF 1400

The innovative tool concept at a glance

## Perfection in all areas.

A tool concept that sets new standards: whether the issue is size, weight, handling or power – the OF 1400 impresses point by point. As a new development, it fulfils all requirements of a router in the median power class.

No matter what you have in mind: the OF 1400 is characterised by detailed equipment that leaves nothing to be desired. For perfect routing results with easy handling.



### Independent accuracy.

With the accurate depth setting with "Zero" function and free of play, the routing depth can be adjusted quickly and without the need for recalculation. The fine adjustment is accurate to 1/10 mm.



World first

### Complete stability.

Once the routing height is set, the router is clamped to both guide columns at the same time with only one clamping handle. It is absolutely torsionally resistant and guarantees exact routing results.



World first

### Endless time saving.

The router bit change is faster and safer than ever thanks to the convenient spindle stop with rocker and ratchet technique. The router bit is changed without converting the spanner and the OF 1400 is ready for action in a flash.



### Undeniably fast.

A single rotary knob is all it takes to simultaneously secure both guide rods. In this way, the parallel stop is quickly installed and removed.



### Tremendously handy.

Without having to change grip, you can operate the on/off switch and the stepless speed adjustment. This means that the machine is always safely in your hand.



### Remarkable handling.

Little effort: especially when routing corners, the ergonomically shaped bar handle is ideal for safe guidance of the router. The OF 1400 allows you to work longer and with less strain.



### Unbeatable depth effect.


Due to the high router carriage stroke of 70 mm, tasks with considerable routing depth with templates, or recessing of metal fittings, no longer constitute a problem.



World first

### Completely clean.

Clear prospects: the extractor hood, which is secured without tools, and the new, unique chip catcher quickly and thoroughly eliminate dust at a rate of up to 99 %. This makes clean, healthy work possible.



### Instant change.

A simple click and you're ready. The copying rings are changed quickly and safely completely without tools. And centred exactly into the bargain.

**The new router OF 1400**  
In Detail and in Action

**Unmatched performance. The OF 1400 router sets new standards.**

**Manageability/routing stroke**



**Unlimited application.**

High performance without weight problems: the OF 1400 combines high power with user-friendly handling. Tool design is a prerequisite with the OF 1400.

Weighing just 4.5 kg, the OF 1400 is the **lightest tool in its class** – and all this with an output of 1400 W. The combination of the ergonomic bar handle on the one side and the clamping grip on the other side are essential prerequisites for **fatigue-proof work over long periods**. This improves tool guidance.

With a **routing stroke of 70 mm**, this new router is cut out for many applications. For example: recessing of metal fittings on windows and doors with deep rebates. This compensates for the usable routing depth that is lost when routing templates are used.



Simple routing of circles: set radius, mount OF 1400 with copying ring.



Routing of tilting fillets or angled grooves: no problem with the guide system.

**Dust extraction**



**Problem-free work.**

A neat performance: the optimised extractor of the OF 1400 guarantees that routing chips and dust do not spread out on the workpiece and workplace. The air also remains clean.

The **chip catcher, which can be rotated 360°**, catches the chips and wood dust directly at the router and conveys them to the extractor hood with connected extractor hose. Using this process when **edge routing means that up to 99 %** of the chips and dust created **are extracted**.

Here, the advantages of the bar handle and the extractor hose running parallel to it are demonstrated: they ensure unimpeded work and optimised handling.



The extractor hood can also be used with the router installed.



A simple click and the chip catcher is fitted.

**Double guide column clamping system**



**Irrefutable precision.**

No wobbling here because the OF 1400 is clamped simultaneously at both guide columns. This clamping ensures that the router is **absolutely torsionally rigid**. The routing result: perfect. You can safely forget time consuming reworking.


The router tools are also changed just as easily and comfortably. The new **spindle stop with rocker and ratchet technique** saves you time consuming, repeated conversion of the fork spanner.

Now router and clamping collets can be changed easily and quickly. In the range from 6.35 mm to 12.7 mm, all common clamping collets can be used with the OF 1400.



Thanks to the ratchet technique, router bit changing is comfortable, fast and safe.

**Tool-free copying ring change**

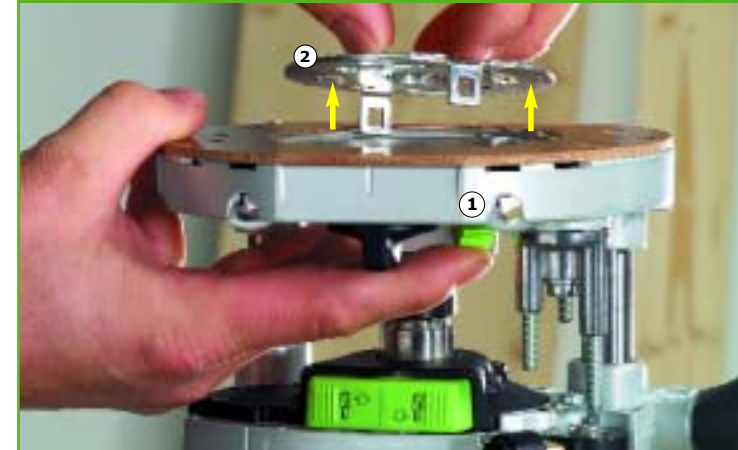

**Uncomplicated replacement.**

Everything is ready in double time. The copying ring is fitted with a simple click, **without effort and without tools**. It can be removed again just as quickly.

This not only saves you time, but you also avoid mistakes: the copying ring fits in only one position and, thanks to the centering system, **is 100 % accurate**.

The system is supplemented by useful accessories that fit the copying ring holder: the base runner with a small hole diameter is ideal for working with small routers. It ensures that the OF 1400 has a flat and stable position on the edge.

**Routing with more precision is not possible!**



Simply fit it: tool-free change between base runner and copying ring (also available for jointing system VS 600).



A simple click and the copying ring is fitted.

# The new router OF 1400

## Safe routing with a system

### Router OF 1400



#### Simple handling, accurate results.

- The double guide column clamping system secures the router and guarantees optimised routing results.
- Convenient router bit change with rocker and ratchet technique without spanner conversion ensures fast and safe router bit change.
- Tool-free, fast copying ring change with exact centering.

Version	Order no.
Scope of delivery: clamping collet diameter 1/2", copying ring diameter 30 mm, extractor hood and chip catcher, side stop with fine adjustment, operating tools, in the Systainer	
<b>OF 1400 EBQ-Plus</b>	574 411

Technical data	
Power input	1400 W
Cutter spindle speed	10 000 – 22 500 rpm
Rapid routing depth setting feature	70 mm
Routing depth fine adjustment	8 mm
Connection for dust extraction dia.	27/36 mm
Weight	4.5 kg



## An alternative to the OF 1400 router is hardly feasible. But suitable supplements are available.

Even on its own, the OF 1400 is a true professional. But together with its matching system accessories, it is unbeatable. From the extraction technique to the guide system and to the individual router tools, all components are optimally tuned to one another for perfect work results, for energy saving work and for versatile application options.

System accessories	Description and application
	<b>Clamping collets with union nut for OF 1400, OF 2000</b> <b>SZ-D6,35, Order No.</b> 492 141 <b>SZ-D8,0, Order No.</b> 492 005 <b>SZ-D9,53, Order No.</b> 492 142 <b>SZ-D10,0, Order No.</b> 492 139 <b>SZ-D12,0, Order No.</b> 492 140 <b>SZ-D12,7, Order No.</b> 492 143
	<b>Copying rings for OF 1400</b> <b>KR-D24,0, Order No.</b> 492 183 <b>KR-D27,0, Order No.</b> 492 184 <b>KR-D30,0, Order No.</b> 492 185 <b>KR-D40,0, Order No.</b> 492 186
	<b>Copying rings for OF 1400/VS 600</b> <b>KR-D8,5, Order No.</b> 492 179 <b>KR-D13,8, Order No.</b> 492 180 <b>KR-D17,0, Order No.</b> 492 181 <b>KR-D24,0, Order No.</b> 492 182
	<b>Base runner for OF 1400</b> reduces the size of the router opening to match the router bit diameter; passage max. 39 mm <b>LA-OF 1400, Order no.</b> 492 574
	<b>Base runner with chip catcher for OF 1400, OF 2000</b> for lateral extraction when working on edges. Base runner on one side with support widener; passage max. 70 mm <b>LAS-OF 1400, Order No.</b> 493 046 Available from August 2004
	<b>Extractor hood for OF 1400/VS 600</b> for lateral extraction when using the OF 1400 on the router jointing system VS 600 <b>AH-OF 1400, Order No.</b> 492 585
	<b>Guide stop for OF 1400</b> for using the OF 1400 router with the guide system FS; with fine adjustment. <b>FS-OF 1400, Order No.</b> 492 601
	<b>Guide rails for routers</b> <b>FS 800/2, Order No.</b> 491 499 <b>FS 1080/2, Order No.</b> 491 504 <b>FS 1400/2, Order No.</b> 491 498 <b>FS 1900/2, Order No.</b> 491 503 <b>FS 2400/2, Order No.</b> 491 502

<sup>1)</sup> Available as standard in the scope of delivery.

### System accessories



### Description and application

<b>Multi-routing template for OF 1010, OF 1400, OF 2000</b> for rectangular or round routing with all Festool routers; all legs can be extended Scope of delivery: 2 angle stops, tilt protection and circle routing insert	
<b>MFS 400, Order No.</b>	492 610
max. routing 300 x 100 mm min. radius 50 mm max. radius 300 mm	
<b>MFS 700, Order No.</b>	492 611
max. routing 600 x 300 mm min. radius 50 mm max. radius 600 mm	
<b>Extension profile for MFS</b>	
<b>MFS-VP200, Order No.</b>	492 722
<b>MFS-VP400, Order No.</b>	492 723
<b>MFS-VP700, Order No.</b>	492 724
<b>MFS-VP1000, Order No.</b>	492 725
<b>MFS-VP2000, Order No.</b>	492 726
<b>Routing carriage for OF 1400</b> for routing large surfaces <b>MFS-FS, Order No.</b>	492 728
<b>Worktop routing template for OF 1400</b> for corner and panel joints with depth up to 900 mm; copying ring dia. 30 mm required <b>APS 900, Order No.</b>	492 727
<b>Routing aid for OF 1010, OF 1400, OF 2000</b> for routing Schalllex, Kältefeind (door seals) and espagnolettes in doors and windows <b>FH-OF 2000, Order No.</b>	492 037
<b>Jointing system for OF 1010, OF 1400</b> for production of covered and open dovetail joints as well as dowel and slot joint <b>VS 600, Order No.</b>	488 876
<b>Work module for bench-mounted router for OF 1400 and OF 2000</b> for bench-mounted use in the Basis Plus; complete with protection device and stop; max. router bit diameter 70 mm <b>Basis 6 A, Order No.</b>	570 107
<b>Mobile dust extractor CT</b> (as an example of the CT mobile dust extractor series) Scope of delivery: 1 mounted filter bag, suction hose dia. 27 x 3.5 m-AS, sealing cover for suction spout, in a box <b>CT 33 E, Order No.</b>	583 304
<b>Router tools for OF 1010, OF 1400, OF 2000</b> for routing round edges and transitions of solid surface (mineral materials). <b>Select from around 160 router bits.</b>	
Further information is available in the router bit brochure, from your specialist dealer, in the main catalog or under <a href="http://www.festool.com">www.festool.com</a>	

### The Festool Routers – manageability and perfection

With the new OF 1400 router and the tried-and-tested OF 1010 and OF 2000 routers, you have at your disposal a router easily capable of covering all routing tasks.



**OF 1010**  
 The OF 1010: handy and small for light routing. With its light weight and easy single-handed operation, the fine adjustment ensures perfect work results in the precision work area.



**OF 1400**  
 The OF 1400 – the handy medium-sized router for light to heavy routing – a multi-talented tool. With its incomparable combination of manageability and routing depth, it is an ideal solution to numerous application problems.



**OF 2000**  
 The OF 2000 – the big one for heavy routing work. High power combined with an armature shaft with a double bearing produce a neat routing surface, even with the most difficult of materials.

The router range is supplemented by the edge routers OFK 500 and OFK 700 for faultless finished edges.